

QTZ63(5610Y-6)

技术参数 Main parameters

型号 Type	QTZ63(5610Y-6)
基本高度 Basic height	40m
最大高度 Max height	220m
臂长 Length	56m/51m
最大吊重 Max load	6t
臂端吊重 Tip load	1.0t/1.3t
标准节尺寸 Section size	1600×1600×2500
标准节材料 Section material	圆管 Round tube


起重特性 Load diagrams

幅度 Radius	倍率 Fall	m/kg	25-14.18	16	21	25.24	28	29	31	36	41	46	51	56
56m		2.5-24.24m 3000kg	3000			3000	2893	2521	2315	1902	1593	1352	1159	1000
		2.5-14.18m 6000kg	6000	5202	4239									
51m		2.5-26.23m 3000kg	3000			3176	2774	2550	2104	1769	1508	1300		
		2.5-15.26m 6000kg	6000 (2-14.26mm)	5677	4114									

传动机构 Mechanisms

机 构 Mechanisms	图 例 Example	速 度 (m/min)		功 率 (kw)	电 机 Electromotor
起 升 Hoisting		 低速 Low	8.5	24/24/5.4	YZTD250M3-4/8/32
		中速 Intermedite	40		
		高速 High	80		
		 低速 Low	4.25		
		中速 Intermedite	20		
		高速 High	40		
变 幅 Trolleying		44/22		3.3/2.2	YDEJ132S-8/4
回 转 Slewing		0-0.6r/min		2×3.7	YZR132M2-6
爬 升 Climbing		0.5m/min		5.5	Y132S-4
行 走 Traveling		10.4m/min		5.5×2	Y132M2-6
电 源 Mains supply				~380V·50HZ	
总功率 (包含顶升) Including top lifting				51.2kw	

外形尺寸 DIMENSIONS

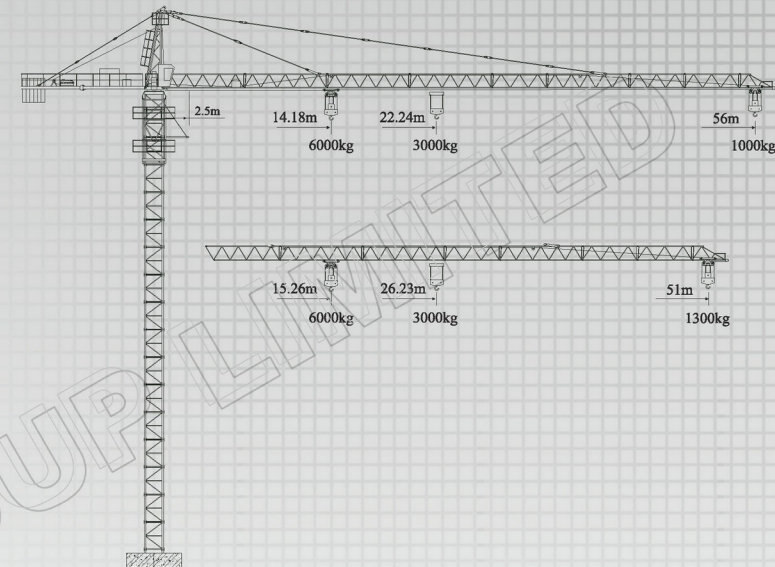

技术状态 STATUS

